

Illuminated push button, connector M12, Ø 22 mm, stainless steel 316L, cable 200 mm, 90°

82-665G.1000



<https://www.eao.com/component/82-665G.1000/en...>

Your product:

---



82-665G.1000

Illuminated push button, connector M12,  
Ø 22 mm, stainless steel 316L, cable  
200 mm, 90°

#### FRONT

**Front dimension:** Ø 25 mm

**Front form:** Round

**Front bezel material:** Stainless steel 316L

**Front bezel shape:** Flush

#### MOUNTING

**Mounting cut-out:** Ø 22 mm

**Mounting type:** Panel mounting

#### OPERATING-/INDICATION PART

**Lens colour:** Silver

**Lens material:** Stainless steel 316L

**Lens illumination:** Non illuminated

**Lens shape:** Flush

**Lens optics:** opaque

#### ELECTRICAL CHARACTERISTICS

**Switching voltage and switching current:** according to UL 508 (Silver contacts)  
 $\cos\phi$  0,75 ... 0,8

Voltage	Current
120 VAC	5 A
240 VAC	3 A
24 VAC	1 A

according to IEC 60947-5-1 (Silver contacts)

Service categorie AC-15

Voltage	Current
24 VAC	1 A
35 VAC	1 A (M12 version)
110 VAC	1 A
220 VAC	0.5 A
Switch rating DC service categorie DC-13 (Silver contacts)	
Voltage	Current
24 VDC	0.7 A
35 VDC	0.5 A (M12 version)
110 VDC	0.2 A
220 VDC	0.1 A

**Rated Operational Voltage Ue:** 250 VAC

**Rated insulation voltage Ui:** 250 V

**Switching rating:** 35 V AC/DC @ 0,6 A

**Electrical lifetime:** 50 000 cycles of operation

**Electric strength:** 1500 VAC, 50 Hz 1 minute between life terminals and ground

**Pollution degree:** 2, according to EN IEC 60947-1

**Thermal current Ith:** 5 A

## MECHANICAL CHARACTERISTICS

**Terminal:** Cable 200 mm, 90°, Connector M12

**Switching action:** Momentary

**Switching system:** Snap-action switching element

**Mechanical lifetime:** 1 Mil. cycles of operation

**Operating force:** 4 N ... 7 N

**Operating Travel:** ca. 3 mm

**Tightening torque:** 0.5 ... 0.6 Nm

**Weight:** 0.046 kg

## AMBIENT CONDITION

**IP front protection:** IP65, IP67

**Operating temperature:** - 30 °C ... + 70 °C

**Storage temperature:** - 40 °C ... + 80 °C

**Shock resistance:** Max. 500 m / s<sup>2</sup> as per IEC 60068-2-27

**Vibration resistance:** 10 ... 500 Hz, amplitude 1.5 mm p-p according to IEC 60068-2-6

**Climate resistance:** Damp heat, 21 days according to IEC 60512-11

## CERTIFICATE

### Conformities:

CE, 2011 / 65 / EC (RoHS), 2014 / 35 / EU (LVD)

### REACH:

REACH compliant

### RoHS:


RoHS compliant

## OTHER


### Short Description:

Illuminated push button, connector M12, Ø 22 mm, stainless steel 316L, cable 200 mm, 90°, Momentary, 35 V AC/DC @ 0,6 A, Cable 200 mm, 90°, Connector M12, Round, Stainless steel 316L, Silver

### Wiring diagrams:

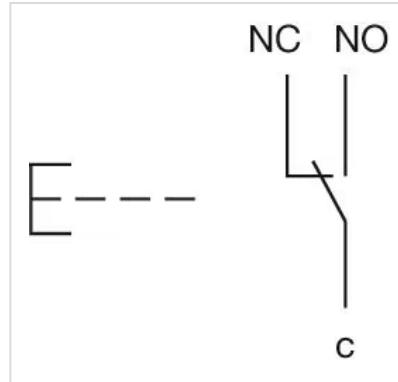

### Component layouts:

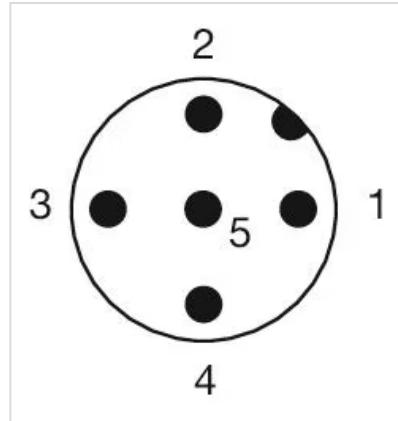

### Mounting cut-outs:



**Dimension drawings:**

